


1551



제품스펙

|                                             |          |
|---------------------------------------------|----------|
| 제조사                                         | MENNEKES |
| IP GRADE                                    | IP67     |
| 전압(VOLTAGE)                                 | 400V     |
| 전류(AMPARE)                                  | 32A      |
| 극(POLES)                                    | 5P       |
| 독일 Mennekes사의 Panel sockets (Slopping) 입니다. |          |

도면&치수

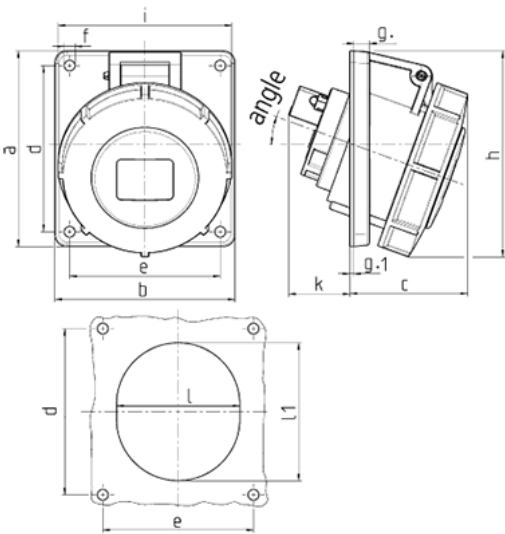

| Drawing<br>1 MB 251 | Amp.<br>Poles                                       | 16        |           |           | 32         |            |            |
|---------------------|-----------------------------------------------------|-----------|-----------|-----------|------------|------------|------------|
|                     |                                                     | 3         | 4         | 5         | 3          | 4          | 5          |
| Dim. in mm          | a                                                   | 73.5      | 100       | 100       | 100        | 100        | 100        |
|                     | b                                                   | 64        | 92        | 92        | 92         | 92         | 92         |
|                     | c                                                   | 52        | 60        | 62        | 64         | 64         | 66         |
|                     | d                                                   | 60        | 85        | 85        | 85         | 85         | 85         |
|                     | e                                                   | 52        | 77        | 77        | 77         | 77         | 77         |
|                     | f                                                   | 5.5       | 5.5       | 5.5       | 5.5        | 5.5        | 5.5        |
|                     | g                                                   | 8         | 8         | 8         | 8          | 8          | 8          |
|                     | g.1                                                 | 2         | 2         | 2         | 2          | 2          | 2          |
|                     | h                                                   | 84        | 100       | 105       | 109        | 109        | 113        |
|                     | i                                                   | 78        | 85        | 96        | 103        | 103        | 110        |
|                     | k                                                   | 43        | 32        | 32        | 53         | 53         | 45         |
|                     | l                                                   | 52        | 55        | 65        | 67         | 67         | 72         |
|                     | l1                                                  | 60        | 63        | 72        | 82         | 82         | 85         |
|                     | o                                                   | 20°       | 20°       | 20°       | 20°        | 20°        | 20°        |
|                     | Terminal for cond. cross<br>section (mm²) min.-max. | 1.5<br>—4 | 1.5<br>—4 | 1.5<br>—4 | 2.5<br>—10 | 2.5<br>—10 | 2.5<br>—10 |